



NEW

up to 25 dBm

RF sweep

9 kHz to 1040/2080 MHz


Signal Generators SMY

Versatility and low cost can go hand in hand

- Frequency resolution 1 Hz
- Level range -140 to +19 dBm, overrange up to 25 dBm (option)
- Level accuracy better than 1 dB
- SSB phase noise <-114 dBc at 1 GHz, $\Delta f = 20$ kHz
- AM, FM, ϕ M and pulse modulation
- Modulation generator 1 Hz to 500 kHz
- Sweep capabilities
- Nonvolatile memory for 100 complete front-panel setups
- RF overload protection 30 W (SMY01) or 50 W (SMY02)
- Low RF leakage (<0.1 μ V)
- Calibration at 3-year interval



ROHDE & SCHWARZ

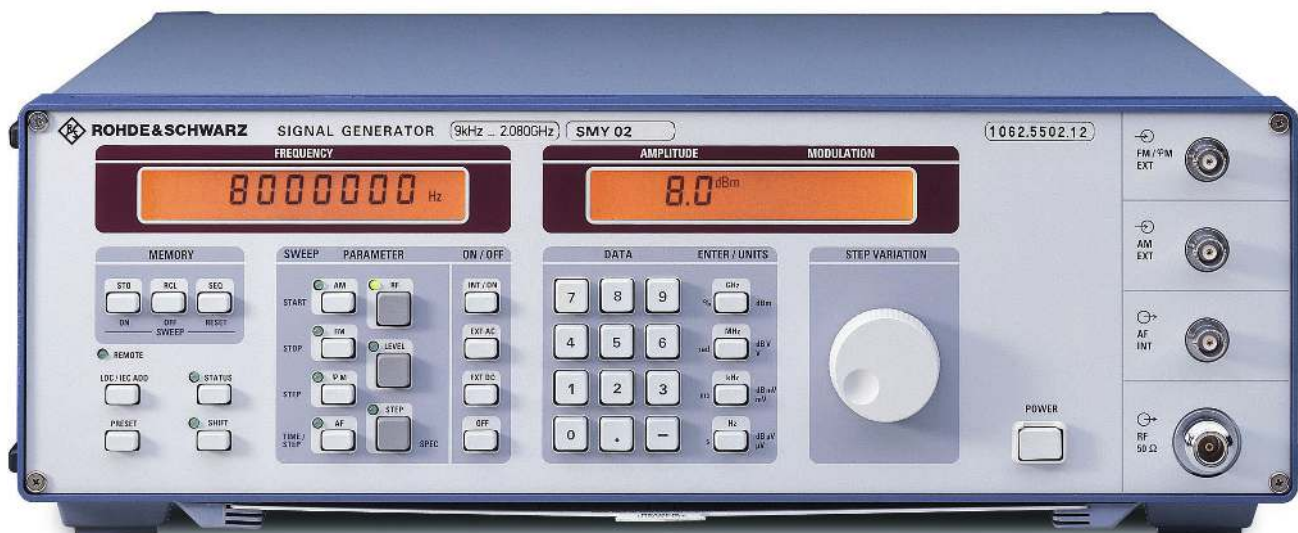

SMY – the ideal generator for receiver measurements ...

Signal generators of the SMY family from Rohde&Schwarz are cost-effective instruments for testing AM, FM and ϕ M receivers as well as for component measurements. Two models are available:


- SMY01 with a frequency range from 9 kHz to 1040 MHz
- SMY02 from 9 kHz to 2080 MHz.

Designed exclusively for the main applications of signal generators by cutting out the unnecessarys, SMY features an outstanding price/performance ratio. Thanks to its comprehensive basic features and excellent signal characteristics, it is an economical solution for universal use in lab, production and servicing environments.

- Level range -140 dBm to $+13$ dBm (19 dBm overrange ^{*)}, sufficient even for receivers of highest sensitivity
- High level accuracy and low RF leakage allowing accurate and undegraded sensitivity measurements
- FM-DC with high accuracy of carrier frequency for testing pagers and receivers fitted with digital squelches
- Low SSB phase noise and high spurious rejection for all in-channel and blocking measurements
- Low residual FM affording ample of margin for S/N measurements
- Modulation generator 1 Hz to 500 kHz for modulation frequency response measurements
- Stereo channel separation of 50 dB and low harmonic distortion for testing FM stereo receivers

... and for general-purpose applications


Thanks to the excellent spectral purity and the high accuracy of the carrier frequency with FM-DC, measurements on steep-edged crystal filters are possible without any problem.

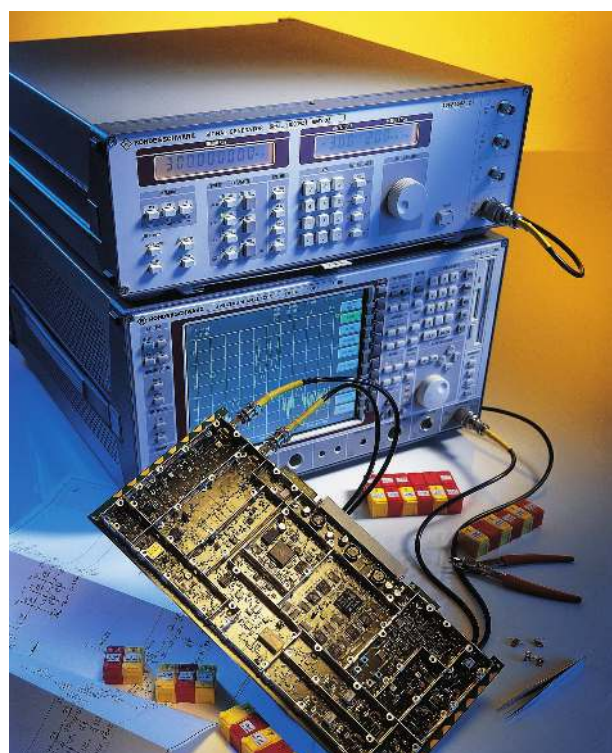


^{*)} With option SMY-B40 -134 dBm to $+19$ dBm (25 dBm overrange)



With option SMY-B40:
The overrange feature
for the output level
allows measurements
on high-level mixers. To
the right: output level ob-
tained with settings of
19 dBm, 21 dBm,
23 dBm and 25 dBm

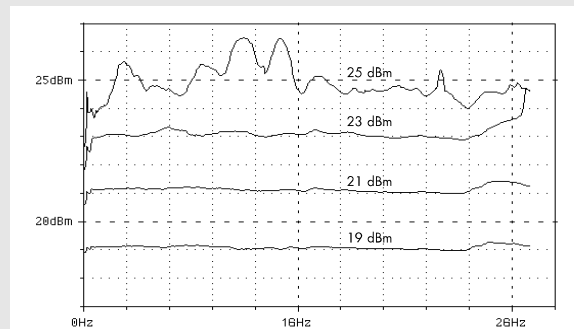


Accuracy of carrier
frequency with FM-DC,
long-term stability.
Settings: carrier
frequency = 1 GHz,
FM deviation = 50 kHz,
external FM-DC

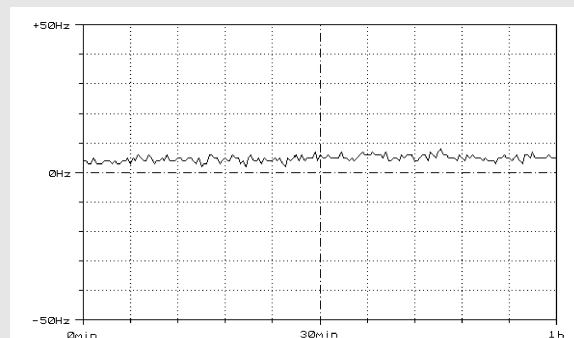


- Non-interrupting level setting over a range of 20 dB for reproducible measurement of squelch hysteresis
- Frequency resolution 1 Hz, suitable also for narrowband test items
- FM-DC, deviation up to 20 MHz for VCO simulation
- FM bandwidth 2 MHz for fast FSK and telemetry applications
- High output level up to 19 dBm (25 dBm with option SMY-B40) for component and overdrive testing
- AF synthesizer 1 Hz to 500 kHz, separate use as AF signal source for external applications possible, eg recording of AF frequency response
- Remote-control interface IEC 625/IEEE 488 for use in automatic test systems
- RF sweep
- Sequence function and SEQ input for semi-automatic use


FM frequency
response of SMY.
Frequency modulation
is possible even at full
deviation up to high mo-
dulation frequencies

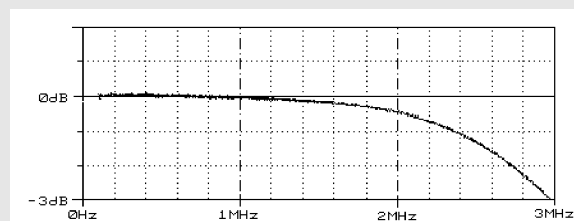

Level/frequency
response at 0 dBm
output level. The soft-
ware-supported level
correction reduces the
frequency response to
typically 0.1 dB

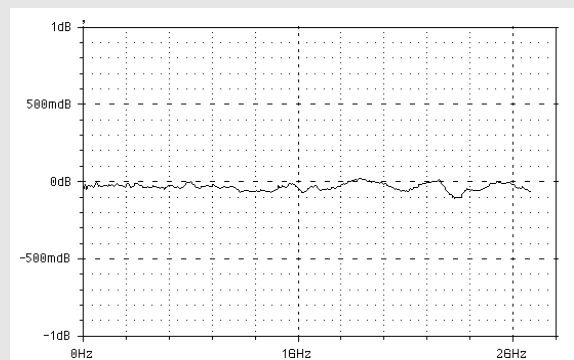

Phase-continuous
frequency change of
modulation generator.
To the right:
frequency change from
10 Hz to 40 Hz

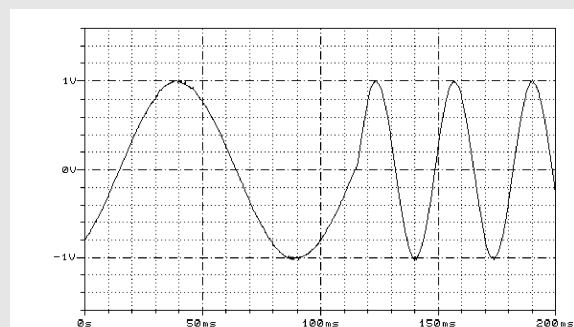

Cost-saving synthesis concept

Single-loop synthesis is a concept that makes for simple and cost-effective circuit design and does not entail giving up high frequency resolution and short setting time. The fractional-N technique uses a fractional frequency division ratio, ie a frequency resolution of 1 Hz is obtained in spite of the high reference frequency. High reliability and light weight thanks to VLSI components are further advantages of this technique.

Operation

The panel controls are ergonomically arranged so that there is no time wasted for familiarization. Operation is from the left to the right: parameters, data, units; each control is at its right place.

The patented, magnetically locking spinwheel is just as practical. Although easy to turn, each setting step is felt exactly by the user. Thus for instance it is not really necessary to observe the SMY display in the case of stepwise tuning. This means that the annoying procedure of looking back and forth between a

measuring instrument and the signal generator can be dispensed with. Naturally fast tuning and programming of the step width are also possible.

Frequently used settings can be stored and recalled any time. The memory saves up to 100 complete front-panel setups.

Low cost of ownership thanks to high reliability and easy maintenance

Like with all Rohde & Schwarz signal generators, the well-proven self-test facility is integrated in SMY monitoring continuously the signal generator status. If there are any malfunctions, these are immediately detected and reported in the form of error messages. The user thus has an effective protection against invalid measurements, should the generator ever fail.

Thanks to its advanced circuit design, SMY requires particularly little maintenance. Aging and drift are compensated for by control loops. Due to the few reference components, which are desi-

gned for maximum stability, calibration is required at intervals of 3 years only.

If the accuracy is required to be higher than the specified data, user-specific calibration values for frequency and level may be entered and stored at any time without opening the instrument.

Further development of proven technology

Signal Generators SMY from Rohde & Schwarz stands for the economy class of generators. Well-proven features have been improved and unnecessary details omitted. It is the sum of its characteristics which makes SMY so attractive. Tangible for the user are the variety of facilities and versatility at an excellent price/performance ratio. SMY is the economical solution for universal use in lab, production and servicing environments.



Rear-panel of SMY

Specifications

Frequency

Range
9 kHz to 1.04 GHz (SMY01)
9 kHz to 2.08 GHz (SMY02)

Underranging
without guarantee of specs
Resolution
down to 5 kHz
1 Hz

Setting time (to within
 $<1 \times 10^{-7}$ for $f > 65$ MHz or
 <70 Hz for $f < 65$ MHz)
 <60 ms

Reference frequency

Aging (after 30 days of operation)
Temperature effect (0 to 55 °C)
Warmup time
standard
 1×10^{-6} /year
 2×10^{-6}
option SMY-B1
 $<1 \times 10^{-9}$ /day
 $<5 \times 10^{-8}$
10 min

Output for internal reference

Frequency
Level (EMF, sine wave)
Source impedance
10 MHz
1 V (rms)
50 Ω

Input for external reference

Frequency
Input level
Input impedance
5 or 10 MHz $\pm 5 \times 10^{-6}$
0.2 to 2 V (rms)
200 Ω

Spectral purity

Spurious
Harmonics
standard
 <-30 dBc for
levels <10 dBm
option SMY-B40
 <-25 dBc for
levels <16 dBm

Subharmonics
 $f \leq 1.04$ GHz
 $f > 1.04$ GHz
none
 <-40 dBc

Nonharmonics
at >5 kHz from carrier
 $f \leq 1.04$ GHz
 $f > 1.04$ GHz
 <-70 dBc
 <-64 dBc

Broadband noise with CW¹⁾,
carrier offset >1 MHz,
1 Hz bandwidth
 $f = 1$ to 65 MHz
 $f > 65$ MHz
 <-135 dBc
 <-140 dBc

SSB phase noise at
20 kHz from carrier,
1 Hz bandwidth, CW
 $f < 65$ MHz
100 MHz
500 MHz
1 GHz
2 GHz
 <-114 dBc
 <-132 dBc
 <-120 dBc
 <-114 dBc
 <-108 dBc

Residual FM, rms, $<1\%$ of
maximum deviation, $f = 1$ GHz
0.3 to 3 kHz (CCITT)
0.03 to 20 kHz
Residual AM, rms (0.03 to 20 kHz)¹⁾
 $<0.02\%$

Level

Range
Overranging
without guarantee of specs
standard
-140 to +13 dBm
option SMY-B40
-134 to +19 dBm
up to 19 dBm
up to 25 dBm,
down to -140 dBm

Resolution
0.1 dB

Total error for levels >-127 dBm¹⁾

$f < 1.04$ GHz
 $f > 1.04$ GHz
 ± 1 dB
 ± 1.5 dB
 <1 dB, typ. <0.3 dB

Level flatness at 0 dBm¹⁾

Output impedance
VSWR¹⁾
50 Ω
 <1.5 for $f \leq 1.04$ GHz
 <1.8 for $f > 1.04$ GHz

Setting time (IEC/IEEE bus)
 <25 ms (<10 ms with electronic
level setting)

Non-interrupting level setting
(ATTENUATOR MODE FIXED)
Setting range
0 to -20 dB

Overload protection

protects the instrument against exter-
nally applied (50- Ω source) RF power
and DC voltage

Max. RF power
SMY01
SMY02
30 W
50 W
35 W

Max. DC voltage
Max. pulse loading capacity
(pulse width <10 μ s)
1 mWs or 150 V (V_p)

Simultaneous modulation

any combination of AM, FM (ϕ M) and
pulse modulation

Amplitude modulation

Modes
Modulation depth
Resolution
internal, external AC/DC
0 to 100%²⁾
0.1 %

Setting error at 1 kHz ($m < 80\%$)¹⁾

AM distortion at 1 kHz¹⁾

$f < 10$ MHz
 $m = 30\%$
 $m = 80\%$
 $<1\%$
 $<2\%$

$f > 10$ MHz
 $m = 30\%$
 $m = 80\%$
 $<1\%$
 $<2\%$

Modulation frequency response

flatness ($m = 60\%$)^{1) 3)}
30 Hz (DC) to 10 kHz
10 Hz (DC) to 50 kHz
 <0.4 dB
 <3 dB

Incidental ϕ M with AM (30%),
AF = 1 kHz

<0.2 rad
 <0.4 rad at $f > 1.04$ GHz (SMY02)

Modulation input (AM EXT)

Input impedance
Input voltage for selected
modulation depth
100 k Ω ; 600 Ω jumper-selected
1 V (peak) (for inaccuracy $>3\%$:
high/low indication)

Frequency modulation

Modes
internal, external AC/DC

Maximum deviation for

carrier frequency
 <65 MHz
65 to 130 MHz
130 to 260 MHz
260 to 520 MHz
520 to 1040 MHz
1040 to 2080 MHz

Resolution
Setting error at AF = 1 kHz
FM distortion at AF = 1 kHz
and 3% of maximum deviation
 $<0.3\%$, typ. 0.1 %

Modulation frequency response
flatness
10 Hz (DC) to 2 MHz
 <3 dB, typ. 1 dB

Incidental AM at AF = 1 kHz,
 $f > 1$ MHz, 40 kHz deviation
 $<0.1\%$


Stereo modulation at 40 kHz
deviation, AF = 1 kHz
Stereo separation⁴⁾
 >50 dB

S/N ratio
unweighted
weighted
 >76 dB
 >70 dB
typ. 0.1 %

Harmonic distortion
Carrier frequency offset
with FM-DC⁴⁾
 <1 Hz + 0.1 % of deviation

Modulation input
Input impedance
Input voltage for selected
deviation
FM/ ϕ M EXT
100 k Ω ; 600 Ω jumper-selected

1 V (peak) (for inaccuracy $>3\%$:
high/low indication for
AF = 10 Hz to 100 kHz)

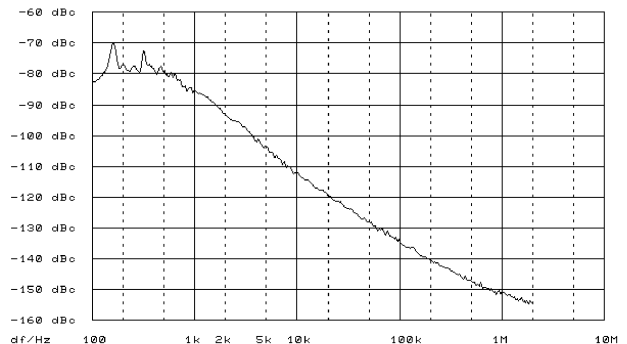

SSB phase noise at 1 GHz (CW)

Phase modulation


Modes	internal, external AC	
Maximum deviation for carrier frequency		
<65 MHz	200 rad	
65 to 130 MHz	25 rad	
130 to 260 MHz	50 rad	
260 to 520 MHz	100 rad	
520 to 1040 MHz	200 rad	
1040 to 2080 MHz	400 rad	
Resolution	<1%, min. 0.01 rad	
Setting error at AF = 1 kHz	<5% of reading + 0.02 rad	
FM distortion at AF = 1 kHz and half the maximum deviation	<0.5% (typ. 0.2%)	
Modulation frequency response flatness		
20 Hz to 20 kHz	<3 dB (typ. 1 dB)	
Modulation input	FM/φM EXT	
Input impedance	100 kΩ; 600 Ω jumper-selected	
Input voltage for selected deviation	1 V (peak) (for inaccuracy >3%: high/low indication)	

Pulse modulation

Mode	standard	option SMY-B40
On/off ratio	external >80 dB	external >70 dB at 70 MHz, linearly decreasing to >65 dB at 520 MHz, >65 dB at 800 MHz, linearly decreasing to >35 dB at 2080 MHz
Rise/fall time (10/90%)	typ. 4 μs	<20 ns
Pulse delay	typ. 3.5 μs	<200 ns
Modulation input	BLANK	PULSE
Input impedance	10 kΩ	10 kΩ
Input level, standard	TTL/HC logic signal, polarity selectable	
Input level, option SMY-B40	TTL/HC logic signal, RF ON at high, RF ON at low jumper-selected	

Internal modulation generator

Frequency range	1 Hz to 500 kHz
Resolution	0.1 Hz
Display	7 digits, floating point
Frequency error	<5 × 10 ⁻⁵
Frequency response flatness	
up to 50 kHz	<0.2 dB
up to 100 kHz	<0.3 dB

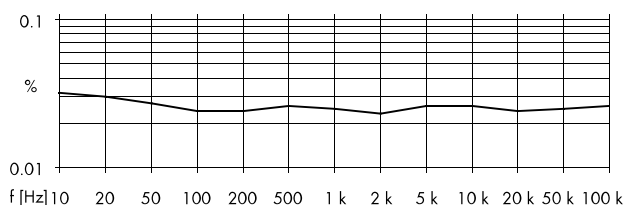

Typical harmonic distortion of AF synthesizer as a function of frequency

THD (20 Hz to 100 kHz)	<0.1 %
Output voltage	1 V (peak) ±1 % (R _{out} <10 Ω, R _L >200 Ω)
Frequency setting time	<10 ms (after receiving last IEC/IEEE-bus character)

RF sweep

Mode	digital sweep in discrete steps
Sweep range and step width	automatic, linear
Step duration	user-selected
Resolution	10 ms to 5 s
	1 ms

Memory

non-volatile, for 100 instrument setups

Remote control

System	IEC 625 (IEEE 488)
Connector	Amphenol, 24-contact
IEC/IEEE-bus address	0 to 30
Interface functions	SH1/AH1/T6/L4/SR1/RL1/PP0/DC1/DT0/CO

General data

Temperature range	
Guaranteed specs	0 to 55 °C; complying with IEC68-2-1 and IEC68-2-2
Storage temperature	-40 to +70 °C

Climatic conditions

Humidity	95% relative humidity at +40 °C; complying with IEC68-2-3
----------	---

Mechanical resistance

Sinewave vibration	5 to 150 Hz, max. 2 g at 55 Hz, max. 0.5 g in range 55 to 150 Hz, complying with IEC68-2-6, IEC1010-1 and MIL-28800D, class 5
--------------------	---

Electromagnetic compatibility

RF leakage	complying with EN50081-1 and EN50082-1 (EMC Directives of EU) <0.1 μV (measured with a two-turn coil of 2.5 cm in diameter at a distance of 2.5 cm from any point of enclosure)
Radiated susceptibility	10 V/m

Power supply

	100 V/230 V (AC) -10 to +15%, 120 V/220 V (AC) -12.5 to +10%, 47 to 440 Hz, max. 120 VA
--	---

Safety

	complying with EN 61010-1
--	---------------------------

Dimensions (W x H x D)

SMY01	435 mm x 147 mm x 350 mm
SMY02	435 mm x 147 mm x 460 mm

Weight

	12 kg (SMY01), 13 kg (SMY02)
--	------------------------------

Ordering information

Signal Generator	SMY01	1062.5502.11
	SMY02	1062.5502.12

Accessories supplied	power cord, operating manual
-----------------------------	------------------------------

Options

Reference Oscillator OCXO	SMY-B1	1062.7505.02
Rear-Panel Connectors for RF and NF	SMY-B10	1062.8001.02
Pulse Modulator and High Output Power ⁵⁾	SMY-B40	1062.9008.02

Recommended extras

19" Rack Adapter	ZZA-93	0396.4892.00
Service Kit	SMY-Z2	1062.7805.02
Service Manual		1062.5583.24

1) Valid for levels ≥ -127 dBm (≥ -121 dBm with option SMY-B40), not with special function »non-interrupting level setting«.

2) The modulation depth selectable within the guaranteed AM specifications linearly decreases for levels from 7 to 13 dBm (13 to 19 dBm with option SMY-B40). A status message appears if the modulation depth is too high.

3) Does not apply to special function »ALC – bandwidth, narrow«.

4) Valid after calibration for one hour and for temperature variations <5 °C.

5) To be retrofitted by authorized service centers only.

**ROHDE & SCHWARZ**

ROHDE & SCHWARZ GmbH & Co. KG · Mühldorfstraße 15 · D-81671 München

P.O.B. 801469 · D-81614 München · Telephone +4989 4129-0 · Fax +4989 4129-3567 · Internet: <http://www.rsd.de>